

**CUSTOMER APPROVAL BLOCK**

**COMPANY**



**SIGNATURE**

**DATE**


Printed Name: \_\_\_\_\_  
Signature: \_\_\_\_\_

**PART LIST**

ITEM #	품 명	Maker P/N	규 격	개별수량(1대 기준)	Note
1.	Sheathing		5.0mm OD PVC Jacket	A/R	
2.	EPOXY	353ND	High Temperature (250°C) for ST Connector		EPOXY TECH
3.	OPTICAL FIBER		0.22 NA, Ø600µm Core, POLYIMIDE BUFFER, UV/VIS, High OH,	19 fibers	

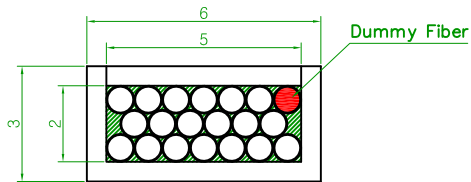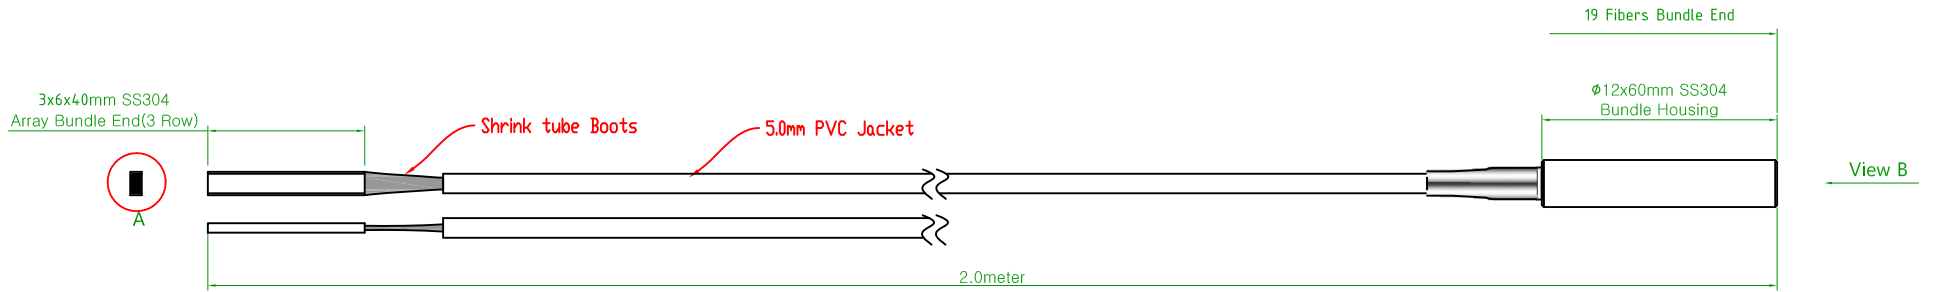

View A (19 Fibers)  
Array Bundle End  
Scale x10

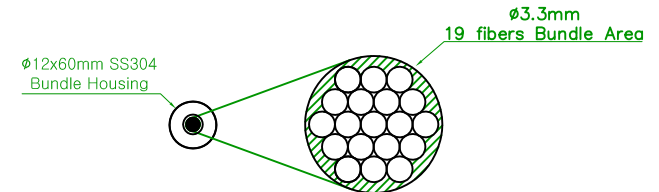

View B (19 Fibers)  
UV Light Input  
Scale: x10

**Note**

1. Fibers in both end: 19 fibers
2. Max. Broken fibers: None
3. Fiber end finish: 0.03um diamond polishing.
4. Glue: Epo-tek 353-ND

Outline	1	삼성전자 생산기술연구소					
Outline	NO	Customer	COLOR	Q'TY	MATERIAL	THICKNESS	
Hidden							
Assist	APPD BY	UNIT	mm	SUBJECT			
Dimension	CHKD BY	SCALE	1:1	TITLE			
Text	DSND BY	TOLERANCE	±0.05	3 Row Array bundle UV light guide			
Hatch	DRWN BY	S.W HAN	DATE				
Center	FIBERLINK. Co.,Ltd.				REF. NO	Sheet No.	of
					DWG NO	eFiberlink-10-A009	Revision No.