


CUSTOMER APPROVAL BLOCK

COMPANY	SIGNATURE	DATE
Printed Name: _____	Signature: _____	

PART LIST

ITEM #	품 명	Maker P/N	규 격	개별수량(1대 기준)	Note
1.	Sheathing	SLDS-22N	3.0mm OD PVC Jacket	A/R	
2.	EPOXY	353ND	High Temperature (250°C) for ST Connector		EPOXY TECH
3.	OPTICAL FIBER		0.22 NA, Ø600µm Core, POLYIMIDE BUFFER, UV/VIS, High OH,	7 fibers	

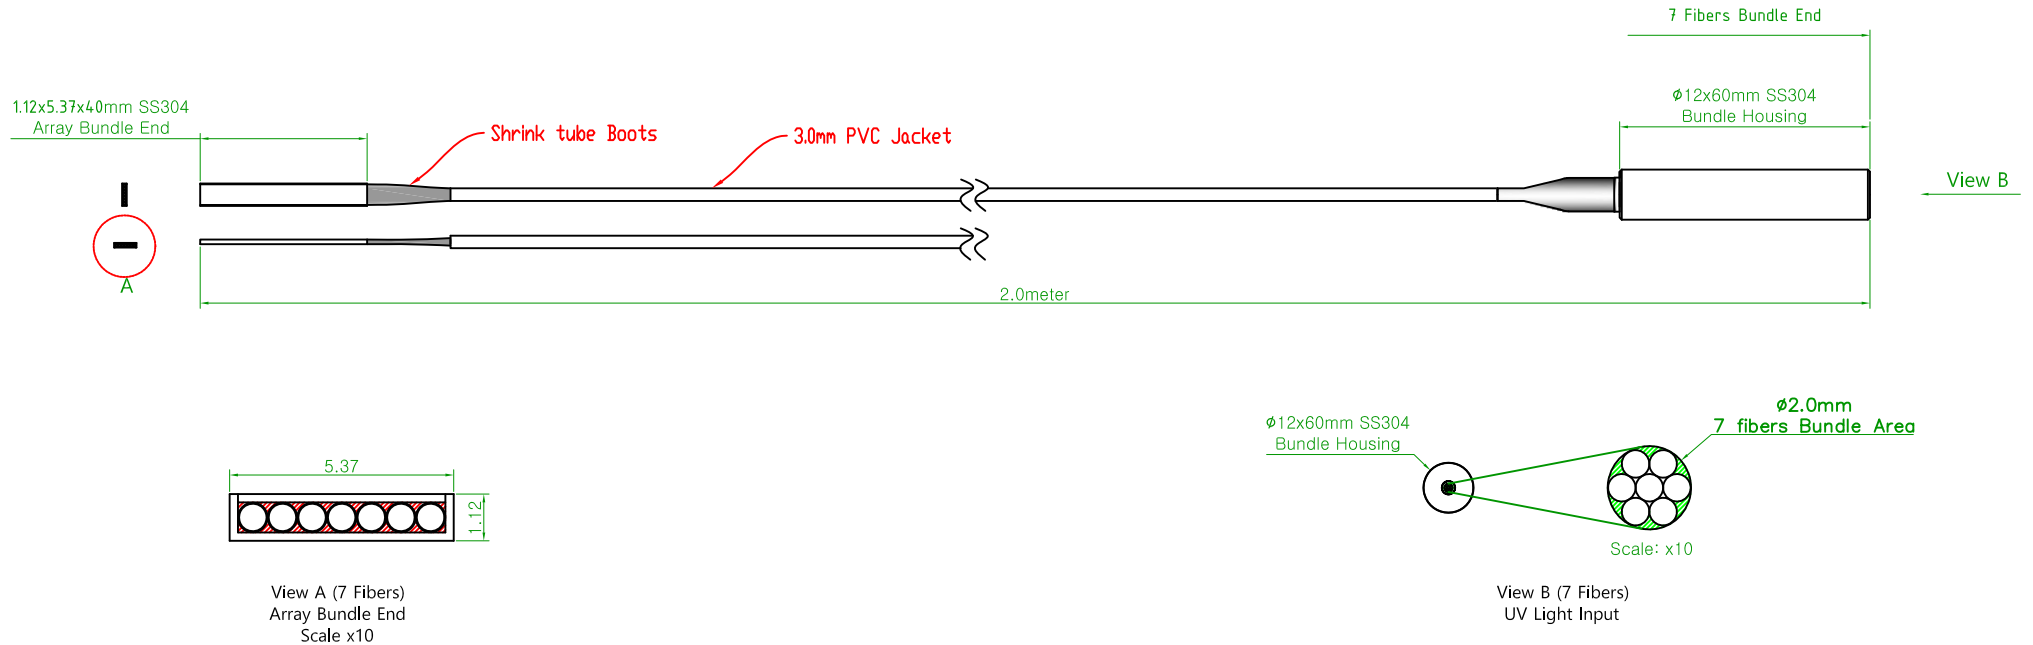

Note

1. Fibers in both end: 7 fibers
2. Max. Broken fibers: None
3. Fiber end finish: 0.03µm diamond polishing.
4. Glue: Epo-tek 353-ND

Outline	1	삼성전자 생산기술연구소					
Outline							
Hidden	NO	Customer		COLOR	Q'TY	MATERIAL	THICKNESS
Assist	APPD BY		UNIT	mm	SUBJECT		
Dimension	CHKD BY		SCALE	1:1	TITLE		
Text	DSND BY		TOLERANCE	±0.05	Array bundle UV light guide		
Hatch	DRWN BY	S.W HAN	DATE		REF. NO		Sheet No. of
Center					DWG NO	eFiberlink-10-A009	Revision No.
		FIBERLINK. Co.,Ltd.					